

NEW! *patent pending*, Dura-Flex™ articulation system provides smooth operation and outstanding range of motion without the associated cost.

Insertion and maneuverability is easily accomplished with this attractively priced veterinarian endoscope, designed especially for biopsy, suction, irrigation and insufflation applications.

High grade optics produce very bright, defect free images, while the intense quartz halogen Lightsource delivers cool, ample light to make identification quick and accurate.

Standard Components:

- 8mm x 53 in. (1.35M)long, high resolution imaging bundle w/10,000 elements. 2mm working channel to sample and retrieve material. ACMI connector for lightguide.
- Carrying case.
- 150 Watt bright white quartz-halogen illuminator.
- 3mm x 72 in.(1.83M) long flexible light guide.

Options:

- Grasping forceps.
- Retrieval basket.
- Universal fiberoptic light guide to fit other illuminators.
- Biopsy forceps.

Specifications:

Shaft Outside Diameter:	.315 in. (8mm)
Bend Radius:	1.5 in. (38mm)
Shaft Construction:	Flexible, braided SS covering suitable for wipe down.
Shaft Length:	53 in. (1350 mm)*
Articulation:	Four way: +/-120° Left, right, down; +/-180° up.
Field of View:	70° STD**
Depth of Field:	.2 in. to 4.0 in. (5mm to 100mm)
Eyepiece:	Diopter Adjustable
Direction of View:	Forward Viewing STD.***
Light Guide Connector:	ACMI


*4-way lengths up to 10' available upon request.



VSF8x135 Control surfaces are easy to reach and use.



Quality accessories expand the capability of the instrument, improving your productivity while shortening your procedure times.

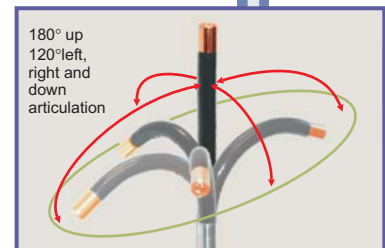

4 way articulation guides the viewer around with tremendous control and ease..