



The use of fiberscope technology will reduce or eliminate tear downs

Specifically designed for QA applications and preventative maintenance inspection programs, the FS6x40 flexible fiberscope provides high-resolution images of difficult to reach areas. Look around corners and into deep recesses without the need for costly, time consuming tear down.



FS6x40 comes complete with case, scope and light source.

High grade optics produce very bright images, and our *patent pending Dura-Flex™* articulation system provides outstanding range of motion and durability without the associated cost.

Standard system includes:

- High resolution imaging bundle w/10,000 elements.
- Portable battery handle - 3V.
- Custom foam lined carrying case.


OPTIONS

- 150 Watt quartz-halogen illuminator.
- 3mm x 72 in. (1829mm) long flexible light guide.
- Right angle viewing adapter.


Part No.	Shaft O. D.	Bend Radius	Shaft Construction	Shaft Length	Articulation	Field of View	Depth of Field	Eyepiece Type	Direction of View	Light Guide Conn.
FS6-2	.236 in. (6mm)	1.5in. (38mm)	Flexible, braided SS covering	40 in. (1000mm)	Two way: (Up/down)+/- 120°	50° STD**	2:4.0 in. (5-100mm)	Diopter Adjustable	Forward Viewing STD	ACMI
FS6-4	.236 in. (6mm)	1.5in. (38mm)	Flexible, braided SS covering	40 in. (1000mm)	Four way: (Up)+/- 180°; Left, right and Down +/- 120°	50° STD**	2:4.0 in. (5-100mm)	Diopter Adjustable	Forward Viewing STD	ACMI



Control surfaces are easy to reach and use. 10000 pixel field assures bright, sharp, detailed images.

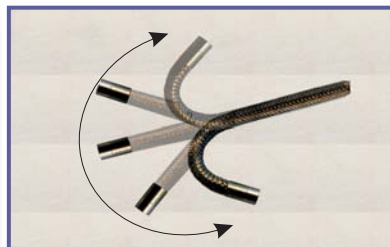

2 way articulation guides the viewer around corners and dark recesses.

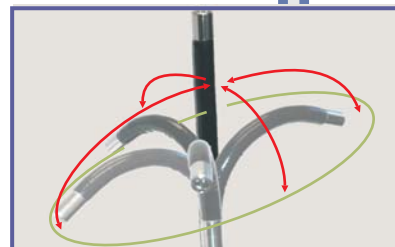

4 way articulation maximizes versatility and effectiveness

1 Vision Road, Pomfret Connecticut 06258

PHONE 860-963-1141 FAX 860-928-7036

1-800-4-SCOPES (800 472-6737)

www.scopetech.com rgreene@scopetech.com