

NEW! *patent pending*, Dura-Flex™ articulation system provides smooth operation and outstanding range of motion without the associated cost.

Insertion and maneuverability is easily accomplished with this attractively priced veterinarian endoscope, designed especially for biopsy, suction, irrigation and insufflation applications.

High grade optics produce very bright, defect free images, while the intense quartz halogen Light source delivers cool, ample light to make identification quick and accurate.

Efficient design saves hundreds of dollars in repair costs should the cables break.

Standard Components:

- 6.5mm x 53 in. (1.35M) long, high resolution imaging bundle w/10,000 elements. 2mm working channel to sample and retrieve material. ACMI connector for light guide.
- Carrying case
- 150 Watt bright white quartz-halogen illuminator
- 3mm x 72 in.(1.83M) long flexible light guide

Options:

- Grasping forceps
- Retrieval basket
- Universal fiberoptic light guide to fit other illuminators
- Biopsy forceps

Specifications:


- Shaft Outside Diameter: .256 in. (6.5mm)
- Bend Radius: 1.5 in. (38mm)
- Shaft Length: 53 in. (1350 mm)
- Articulation: Four way: +/-120° Left, Right, Down; +/-180° up
- Field of View: 70°
- Depth of Field: .2 in. to 4.0 in. (5mm to 100mm)
- Eyepiece: Diopter Adjustable
- Direction of View: Forward Viewing
- Light Guide Connector: ACMI
- Manual air/water port for lens cleaning, insufflation and irrigation



VSF6.5-4x135 Control surfaces are easy to reach and use.



Quality accessories expand the capability of the instrument, improving your productivity while shortening your procedure times.

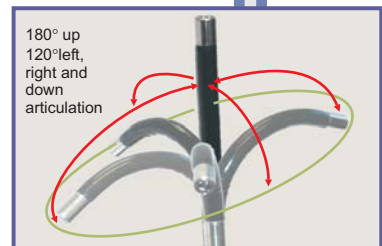

4 way articulation guides the viewer around with tremendous control and ease..